

10/30/00

JC949 U.S. PTO

OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas

New York, New York 10036-8403

(212) 382-0700

Telex

23 6925

Facsimile

(212) 382-0888

Cable

Ostrofaber NewYork

JC945 U.S. PTO

09/699670

10/30/00

Express Mail # EL583742545US

Customer # 2352

Assistant Commissioner for Patents

Washington, DC 20231

Attn: Box Patent Application

OFGS File No.: P/1071-1201

Inventor : Kenji MATSUO and Junshi OTA

Title : ULTRASONIC VIBRATION APPARATUS

Assignee : Murata Manufacturing Co., Ltd.

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 17 Pages of Specification including Abstract and Claims
- 7 Numbered Claims Calculated as 7 Claims for Fee Purposes
- 8 Sheets of Drawing Containing Figures 1 to 11. (Formal)
- X Declaration and Power of Attorney (Unsigned)
- X Patent Application Bibliographic Data
- X Priority is Claimed under 35 U.S.C. §119:
  - Convention Date October 28, 1999 for Japanese Appln. No. 11-307558
  - Convention Date March 7, 2000 for Japanese Appln. No. 2000-61955
- X Certified Priority Application (2)
- X Form PTO-1449 (4 References)
- X Preliminary Amendment
- X Return-Addressed Post Card

OFGS Check No. 1874, which includes the fee of \$710.00, calculated as follows:

Basic Filing Fee:	\$ 710.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	0.00
Number of Independent Claims in Excess of 3, times \$80:	0.00
One or More Multiple Dependent Claims: Total \$270	0.00
Total Filing Fees	0.00
Assignment Recording Fee: \$40	0.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$710.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL583742545US) in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231, on October 30, 2000:

Dorothy Jenkins

Name of Person Mailing Correspondence •

*Dorothy Jenkins*

Signature

October 30/2000

Date of Signature

Respectfully submitted,

*Steven I. Weisburd*

Steven I. Weisburd

Registration No.: 27,409

OSTROLENK, FABER, GERB & SOFFEN, LLP

1180 Avenue of the Americas

New York, New York 10036-8403

Telephone: (212) 382-0700

SIW:lac

00478113.1

Variable	Mean	SD	Min	Max
Age	45.2	12.5	25	65
Gender	0.5	0.5	0	1
Marital status	0.7	0.5	0	1
Education	12.5	2.5	9	16
Income	3500	1500	1000	8000
Health status	0.8	0.4	0	1
Smoking	0.3	0.5	0	1
Alcohol	0.2	0.4	0	1
Exercise	0.5	0.5	0	1
Stress	0.6	0.5	0	1
Depression	0.4	0.5	0	1
Loneliness	0.5	0.5	0	1
Life satisfaction	0.7	0.4	0	1
Quality of life	0.8	0.3	0	1
Healthcare use	0.6	0.5	0	1
Medication	0.4	0.5	0	1
Compliance	0.7	0.4	0	1
Adherence	0.8	0.3	0	1
Engagement	0.6	0.5	0	1
Participation	0.5	0.5	0	1
Empowerment	0.7	0.4	0	1
Self-efficacy	0.8	0.3	0	1
Health literacy	0.6	0.5	0	1
Health knowledge	0.7	0.4	0	1
Health beliefs	0.8	0.3	0	1
Health attitudes	0.9	0.2	0	1
Health expectations	0.7	0.4	0	1
Health goals	0.8	0.3	0	1
Health plans	0.6	0.5	0	1
Health actions	0.7	0.4	0	1
Health outcomes	0.8	0.3	0	1
Health status	0.9	0.2	0	1
Health quality	0.8	0.3	0	1
Health access	0.7	0.4	0	1
Health availability	0.8	0.3	0	1
Health affordability	0.6	0.5	0	1
Health acceptability	0.7	0.4	0	1
Health appropriateness	0.8	0.3	0	1
Health effectiveness	0.9	0.2	0	1
Health efficiency	0.8	0.3	0	1
Health equity	0.7	0.4	0	1
Health justice	0.8	0.3	0	1
Health freedom	0.9	0.2	0	1
Health security	0.8	0.3	0	1
Health stability	0.7	0.4	0	1
Health sustainability	0.8	0.3	0	1
Health resilience	0.9	0.2	0	1
Health robustness	0.8	0.3	0	1
Health flexibility	0.7	0.4	0	1
Health adaptability	0.8	0.3	0	1
Health inclusivity	0.9	0.2	0	1
Health transparency	0.8	0.3	0	1
Health accountability	0.7	0.4	0	1
Health responsibility	0.8	0.3	0	1
Health integrity	0.9	0.2	0	1
Health honesty	0.8	0.3	0	1
Health sincerity	0.7	0.4	0	1
Health genuineness	0.8	0.3	0	1
Health authenticity	0.9	0.2	0	1
Health originality	0.8	0.3	0	1
Health uniqueness	0.7	0.4	0	1
Health individuality	0.8	0.3	0	1
Health specialness	0.9	0.2	0	1
Health preciousness	0.8	0.3	0	1
Health value	0.7	0.4	0	1
Health worth	0.8	0.3	0	1
Health importance	0.9	0.2	0	1
Health significance	0.8	0.3	0	1
Health meaning	0.7	0.4	0	1
Health purpose	0.8	0.3	0	1
Health mission	0.9	0.2	0	1
Health vision	0.8	0.3	0	1
Health dream	0.7	0.4	0	1
Health aspiration	0.8	0.3	0	1
Health ambition	0.9	0.2	0	1
Health desire	0.8	0.3	0	1
Health wish	0.7	0.4	0	1
Health hope	0.8	0.3	0	1
Health faith	0.9	0.2	0	1
Health belief	0.8	0.3	0	1
Health opinion	0.7	0.4	0	1
Health view	0.8	0.3	0	1
Health perspective	0.9	0.2	0	1
Health outlook	0.8	0.3	0	1
Health attitude	0.7	0.4	0	1
Health position	0.8			

CORRESPONDENCE INFORMATION

APPLICATION INFORMATION

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-307558  
Filing Date:: 10-28-1999  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Two:: 2000-61955  
Filing Date:: 03-07-2000  
Country:: Japan  
Priority Claimed:: Yes



In re: Patent Application of

Date: October 30, 2000

Group Art Unit: --

Examiner: --

For: **ULTRASONIC VIBRATION APPARATUS**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Preliminary to the examination of the above-identified application, please amend the application as follows:

## IN THE CLAIMS

Please amend the claims 3 and 4 as follows:

Claim 3, line 2, delete “one”;  
line 2, change “of Claims 1 and 2” to --Claim 2--.

Claim 4, line 1, delete “one”;  
line 2, change “of Claims 1 to 3” to --Claim 3--.

Please add new claims 5-7 as follows:


--5. An ultrasonic vibration apparatus according to Claim 1, wherein a flexible filler whose hardness is lower than that of said casing is filled in said groove.

6. An ultrasonic vibration apparatus according to claim 1, wherein said ultrasonic vibration apparatus is used for an ultrasonic sensor.

The multidependency of the claims has been canceled and new single dependency claims have been substituted therefor.

# EXPRESS MAIL CERTIFICATE

Name of Person Mailing Correspondence  
*Morothy Jenkins*  
 Signature  
 October 30, 2000  
 Date of Signature

  
Steven I. Weisburd  
Registration No.: 27,409  
OSTROLENK, FABER, GERB & SOFFEN, LLP  
1180 Avenue of the Americas  
New York, New York 10036-8403  
Telephone: (212) 382-0700

SIW:lac

## BACKGROUND OF THE INVENTION

The present invention relates to an ultrasonic vibration apparatus such as an ultrasonic sensor used for detecting an object by transmitting and receiving ultrasonic waves.

Hitherto, as disclosed in, for example, Japanese Unexamined Patent Application Publication No. 8-15416, Japanese Unexamined Patent Application Publication No. 8-237795, Japanese Unexamined Patent Application Publication No. 9-284896, and Japanese Unexamined Patent Application Publication No. 10-257595, ultrasonic vibration apparatuses such as ultrasonic sensors employ a construction in which a piezoelectric element having an electrode formed on a piezoelectric plate is mounted in a casing.

Here, the basic construction of the ultrasonic vibration apparatus and an appearance of vibration thereof used for such conventional ultrasonic sensors are shown in Figs. 9A and 9B. Fig. 9A is a cross sectional view showing a state in which a piezoelectric element 1 is mounted inside a casing 2. The casing 2 forms a cylindrical shape in which one end thereof serves as a disk-like vibration plate 2' and

in which the piezoelectric element 1 is bonded on the inner face of the end. When driving voltage is applied to the piezoelectric element 1, the piezoelectric element 1 conducts a bending vibration at a predetermined resonance frequency. Similarly, the disk-like vibration plate 2' also conducts the bending vibration.

Thus, in the state in which the piezoelectric element 1 is bonded on the vibration plate, the resonance frequency depends on the material of the casing 2, the thickness  $a$  of the vibration plate 2', and the diameter  $b$  thereof.

In such conventional ultrasonic vibration apparatuses, the sizes of the vibration plate 2' influence not only the resonance frequency of but also the directivities of the ultrasonic waves at transmission time and at reception time. Generally, by widening the diameter of the vibration face and shortening the wavelength of the ultrasonic waves, directivity becomes narrowed. Accordingly, in an ultrasonic sensor in which narrow directivity is required, the outer diameter  $b$  of the casing is set to be large, further the thickness  $a$  is set to be great in order to set the resonance frequency to be high.

However, when the apparatus is used as an ultrasonic sensor, because of restriction in the size in the outer diameter and restriction of the wavelength to be used, the narrow directivity cannot be obtained without causing the

0000070-103000

apparatus to be large or without causing the operating frequency to be high.

Furthermore, the relationship that the directivity is determined by the area of the above-described vibration face and the wavelength is applied to, strictly speaking, a case in which the vibrating face is parallel-vibrating in a piston-movement manner and in which the ultrasonic wave is emitted as a plane wave. In the conventional ultrasonic apparatus in which the piezoelectric element is mounted in the cylindrical casing having simply one end thereof closed, since the vibration plate 2' performs the bending vibration as shown in Fig. 9B, the ultrasonic waves propagate through air as a spherical wave front. Therefore, there is a problem in that little advantage in obtaining a narrow directivity is achieved even though the vibrating area is widened or the wavelength of the ultrasonic waves is shortened.

Fig. 10 shows the result of computation by a finite-element method (FEM) which is applied to the appearance of deformation in a vibration plate (the casing) due to vibration in a conventional ultrasonic vibration apparatus as shown in Figs 9A and 9B. Fig. 11 shows the result obtained by computing directivity characteristics of the ultrasonic waves which are emitted by this deformation. In this example, an angle (directivity angle) required to cause

000001 07999990



the sound pressure to be decreased up to -6.0 [dB], that is, to cause the sound pressure to be halved, is as wide as 44 degrees.

#### SUMMARY OF THE INVENTION

Accordingly, objects of this invention are to provide a miniaturized ultrasonic vibration apparatus showing narrow directivity characteristics without causing the frequency to be increased.

To this end, there is provided an ultrasonic vibration apparatus which includes a casing having a vibration surface, a piezoelectric element mounted in the casing, and, a disk-like vibration plate supported at a position along a circle defining two regions, an inner region thereof and an outer region thereof. In the ultrasonic vibration apparatus, the disk-like vibration plate is constructed so as to be a part of the casing serving as the vibration face, and the piezoelectric element is mounted in the central part of the disk-like vibration plate, thereby causing the inner region and the outer region to vibrate in substantially the same phase.

This allows a sound wave due to vibration in the inner region of the disk-like vibration plate and a sound wave due to vibration in the outer region thereof to interfere in the space in front of the vibration face of the vibration plate.

000001 02966960

In the ultrasonic vibration apparatus, the casing may be constructed having a cylindrical shape with at least one end thereof closed and a groove is provided in an outer surface in proximity to the closed end of the casing thereby constituting the disk-like vibration plate.

In the ultrasonic vibration apparatus, a flexible filler whose hardness is lower than that of the casing may be filled in the groove.

This allows reverberation characteristics due to vibration in, particularly, the outer region of the vibration plate, to be improved.

In the ultrasonic vibration apparatus, the ultrasonic vibration apparatus may be used for an ultrasonic sensor.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A, 1B, and 1C are diagrams showing the construction of an ultrasonic vibration apparatus according to a first embodiment;

Fig. 2 is a diagram showing the appearance of interference among sound waves emitted from a vibration face of the ultrasonic vibration apparatus;

Fig. 3 is a diagram showing the appearance of deformation of a vibration plate thereof when vibrating;

Fig. 4 is a diagram showing directivity characteristics thereof;

Figs. 5A, 5B, and 5C are diagrams showing the construction of an ultrasonic vibration apparatus according to a second embodiment;

Figs. 6A and 6B are diagrams showing example reverberation characteristics thereof;

Fig. 7 is a diagram showing other example reverberation characteristics thereof;

Fig. 8 is a diagram showing directivity characteristics

000007-02966960

thereof;

Figs. 9A and 9B are diagrams showing the construction of a conventional ultrasonic vibration apparatus;

Fig. 10 is a diagram showing the appearance of deformation of the vibration plate thereof when vibrating; and

Fig. 11 is a diagram showing directivity characteristics thereof.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The construction of an ultrasonic vibration apparatus as an ultrasonic sensor according to a first embodiment of this invention is described with reference to Figs. 1 to 4.

Figs. 1A, 1B, and 1C are cross sectional and top plan views showing the construction of the ultrasonic vibration apparatus. As shown in Fig. 1A, a casing 2 forms a cylindrical shape having one end thereof closed and is molded by die casting or cutting of aluminum. The closed end of this casing 2 is formed in which, by providing a groove 3 in the outer surface of the casing which is in proximity to the closed end, the thickness in the emitting direction of the outer peripheral surface of the casing which is in proximity to the closed end is reduced, thereby this closed overall end constitutes the disk-like vibration plate 2'. At the same time, the above part having the

000001 02965550

As shown in Fig. 1C, in the above supporting unit 4, the disk-like vibration plate 2' is divided into an inner region which is inside the supporting unit and an outer region which is outside the supporting unit. The disk-like piezoelectric element 1 is bonded in the central part of this disk-like vibration plate 2'. This piezoelectric element 1 is obtained by providing electrodes on both principal surfaces of the disk-like piezoelectric plate. By applying alternating voltage across the both electrodes, the piezoelectric element 1 conducts bending vibration.

Here, the dimensions of the casing 2 are as follows:  $d = 9.4$  mm,  $r = 16.0$  mm, and  $a = 1.0$  mm.

The diameter of the piezoelectric element 1 is 7.0 mm and the thickness thereof is 0.15 mm. In this example,

Fig. 2 shows the appearance of interference among sound waves occurring due to vibration of the inner region and the outer region of the above vibration plate with respect to a plane passing through a center axis perpendicular to the vibration plate. Here,  $W_a$  represents the density distribution of the sound waves due to vibration in the inner region of the vibration plate for each moment and  $W_b$  represents the density distribution of the sound waves due to vibration in the outer region thereof for each moment. Thus, when the sound waves  $W_a$  due to vibration in the inner region of the vibration plate interfere with the sound waves  $W_b$  due to vibration in both the right-side and left-side of the outer regions thereof, the sound pressure is maximized having such a direction that a pair of condensed regions of the sound waves overlaps and that a pair of rarified regions thereof overlaps. The sound pressure is minimized having such a direction that a condensed region thereof and a rarified region thereof overlap. This interference state is determined by the interval between the central part which is the antinode of vibration in the inner region of the vibration plate, and the outer peripheral portion which is the antinode of vibration in the outer region thereof; the

wavelength of the generated ultrasonic waves; and the sound pressure of the ultrasonic waves generated in each part of the inner region and the outer region thereof. Therefore conditions are determined, as shown in this Fig. 2, for optimally interfering sound waves in the inner region of the vibration plate and sound waves in the outer region of the vibration plate such that great sound pressure is obtained in the forward direction which is perpendicular to the vibration plate and the sound pressure is weakened in a direction which deviates by a predetermined direction angle or greater from the front. Thus, desired narrow directivity characteristics are obtained.

Fig. 3 shows the result of computation using a finite-element method (FEM) which is applied to the appearance of deformation of the vibration plate due to vibration of the ultrasonic vibration apparatus shown in Figs. 1A to 1C. Fig. 4 shows the result determined by computing directivity characteristics of the ultrasonic waves emitted due to the deformation. In this example, an angle required for decreasing the sound pressure up to -6.0 [dB], that is, an angle (directivity angle) required for having the sound pressure halved is 24 degrees, which is approximately half of 44 degrees shown as the conventional example in Fig. 11.

Because of interference among sound waves from the two vibrating sources (three when illustrated in the cross

000001"02555950

sectional view) including one in the inner region of the vibration plate and one in the outer region thereof, regions for intensifying the sound pressures to each other are generated in directions which are widely separated laterally from the front. They appear as relatively large side lobes. However, the extent of the interference is slight and the sound pressure is approximately -15.0 dB. Accordingly, they are substantially smaller than the main lobe at the front, which is insignificant.

In the ultrasonic vibration apparatus having the construction shown in Figs. 1A to 1C, since the inner region of the disk-like vibration plate 2' vibrates primarily and the outer region thereof vibrates secondarily, after a burst signal for driving this ultrasonic vibration apparatus terminates, the outer region continues to vibrate. Accordingly, there is a risk in which reverberation characteristics degrade compared to a construction having no provision of the outer region. In order to solve this, the width of the supporting unit 4 should be increased. However, since  $Q$  and the coupling coefficient of the ultrasonic vibration apparatus decreases, there is a risk that basic characteristics, other than reverberation characteristics, such as sound pressure, sensitivity, and directivity may be deteriorated.

Accordingly, the construction of an ultrasonic

00000102955550



Figs. 5A to 5C are cross sectional and top plan views showing the construction of the ultrasonic vibration apparatus. It differs from the ultrasonic vibration apparatus shown in Figs. 1A to 1C in that filler 5 is filled in the groove 3. As this filler 5, flexible filling material having a hardness lower than that of the casing 2 is used.

Specifically, reverberation characteristics are shown

in Figs. 6 and 7 when the resonance frequency is 60 kHz,  $r = 16$  mm,  $d = 9.4$  mm,  $a = 0.7$  mm, the width of the supporting unit 4 is 0.5 mm, and the thickness of the piezoelectric element 1 is 0.15 mm. Fig. 6A shows characteristics in a case in which bonding silicone rubber having a hardness of 50 and an elongation of 130% according to JISA, which is the Japanese Industrial Standard for rubber resin, is filled in the groove 3. Fig. 6B shows characteristics in a case in which such filler is not filled therein. Here, when a period from the start timing of the burst signal, which is the driving signal, having a duration of 130  $\mu$ s, to a time at which the received signal decreases below 1[V] is set as reverberation time  $t$ , in the example in Fig. 6B,  $t = 8.0$  ms, while a period from the start timing of the burst signal to a time at which voltage decreases below 1[V] in the example in Fig. 6A, i.e. duration of reverberation is  $t = 700$   $\mu$ s, which is greatly decreased.

Fig. 8 shows directivity characteristics of the above two ultrasonic vibration apparatuses. Thus, the tendency of the sound pressure to drop in which the sound pressure is varied in accordance with deviation of the directivity angle from 0 degree becomes gradual due to filling of the above filler. Therefore, the angle (directivity angle) required for having the sound pressure halved is wider. However, in this example, the widened angle is small.

Thus, by appropriately selecting the hardness and the elongation of the filler, both reverberation characteristics and directivity characteristics can be determined to optimal values within a predetermined specified range.

1. An ultrasonic vibration apparatus comprising:  
a casing having a vibration surface;  
a piezoelectric element mounted in said casing; and  
a disk-like vibration plate supported at a position  
along a circle defining two regions, an inner region thereof  
and an outer region thereof,

said piezoelectric element is provided in the central part of said disk-like vibration plate, thereby causing said inner region and said outer region to vibrate in substantially the same phase.

3. An ultrasonic vibration apparatus according to one of Claims 1 and 2, wherein a flexible filler whose hardness



An ultrasonic vibration apparatus includes a casing having a vibration face, a piezoelectric element mounted in the casing, and a disk-like vibration plate supported at a position along a concentric circle differentiating two regions, an inner region and an outer region. In the ultrasonic vibration apparatus, the disk-like vibration plate is constructed so as to be a part of the casing serving as the vibration face, and, the piezoelectric element is mounted in the central part of the disk-like vibration plate, thereby causing the inner region and the outer region to vibrate in substantially the same phase.

DRAWINGS

FIG. 1A

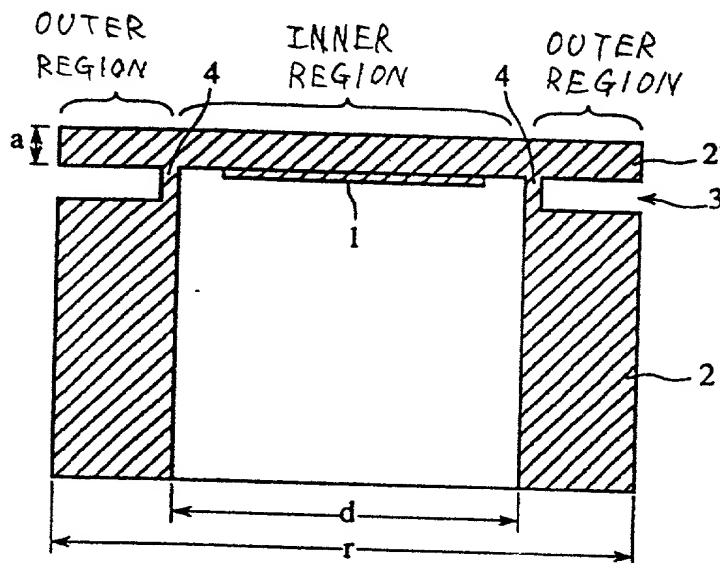


FIG. 1B

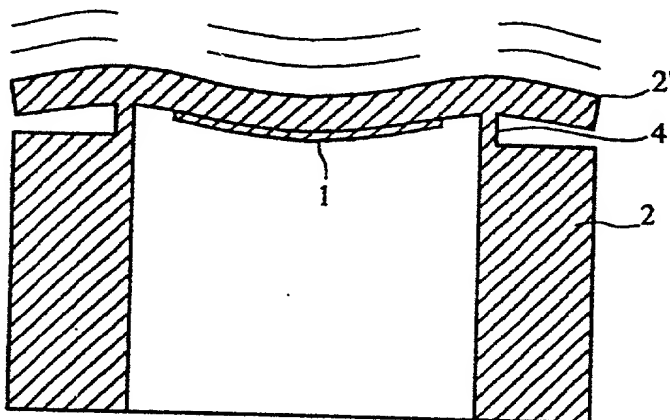


FIG. 1C

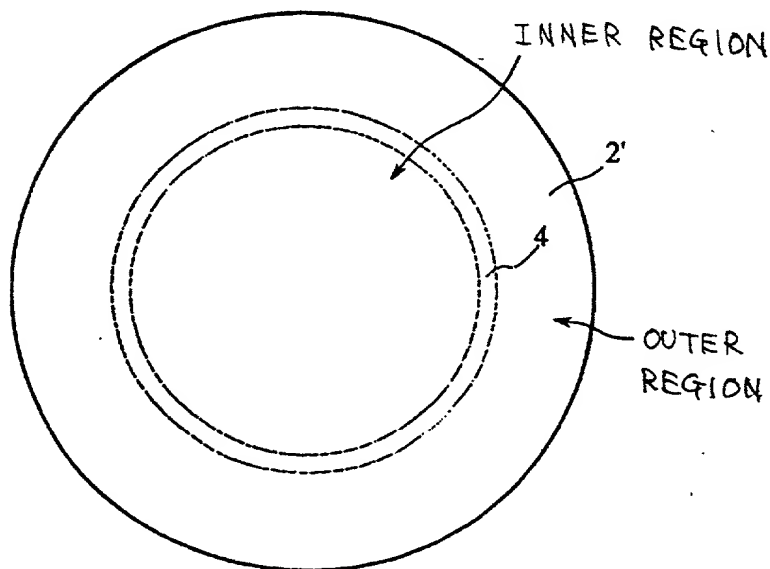


FIG. 2

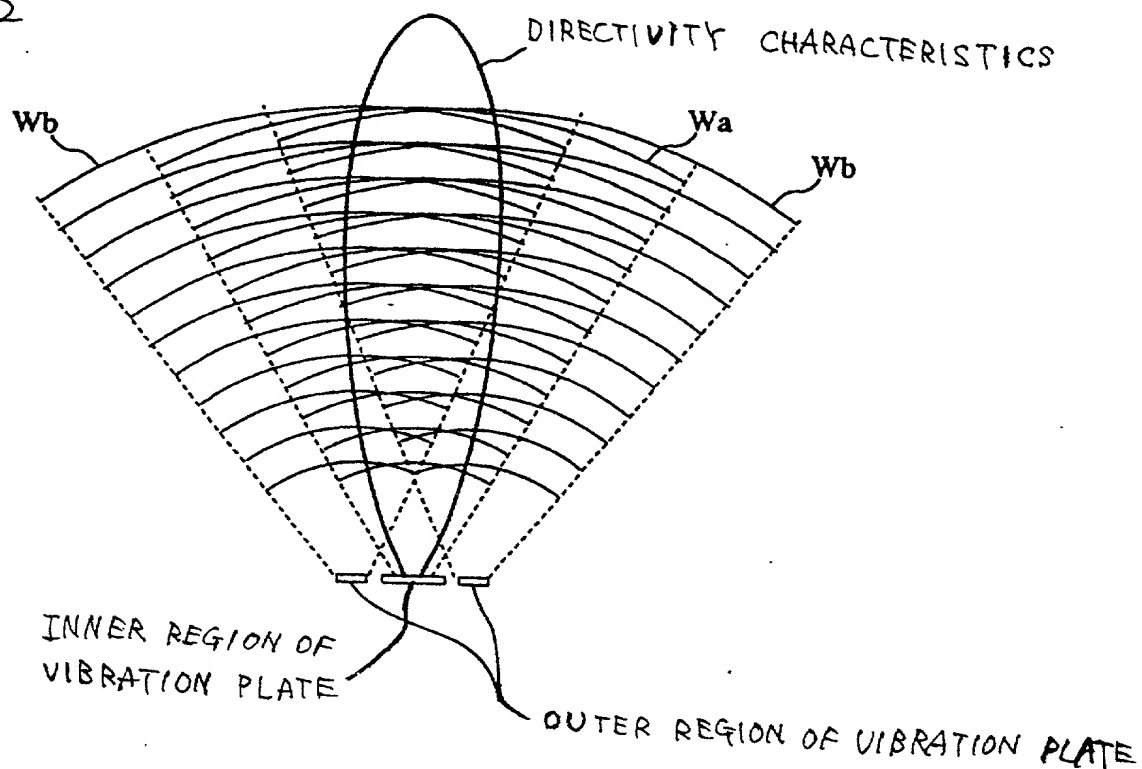


FIG. 3

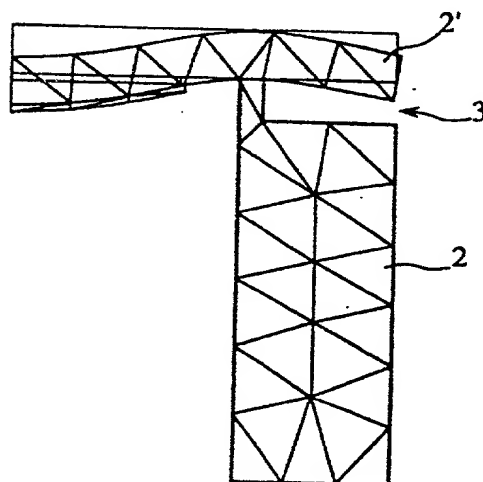




FIG. 4

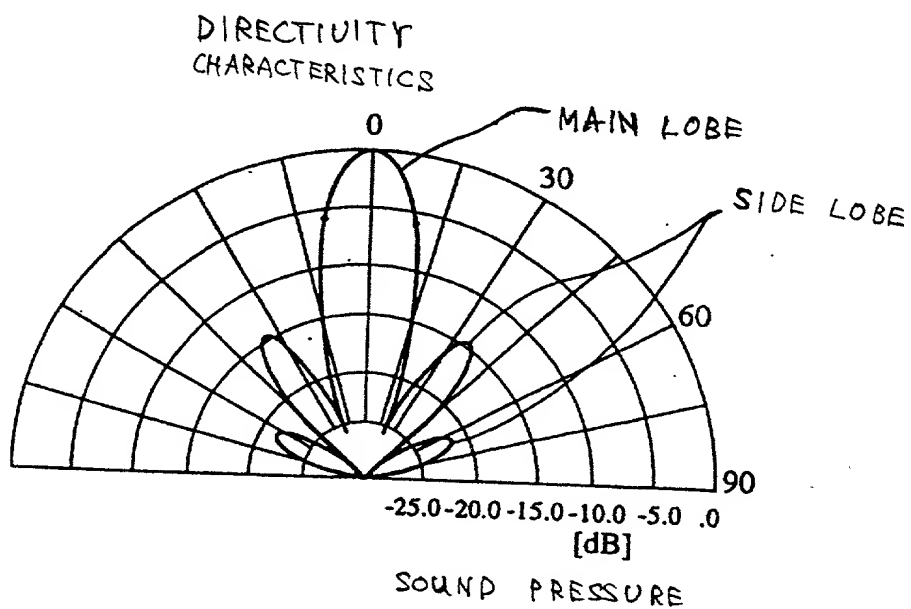


FIG. 5A





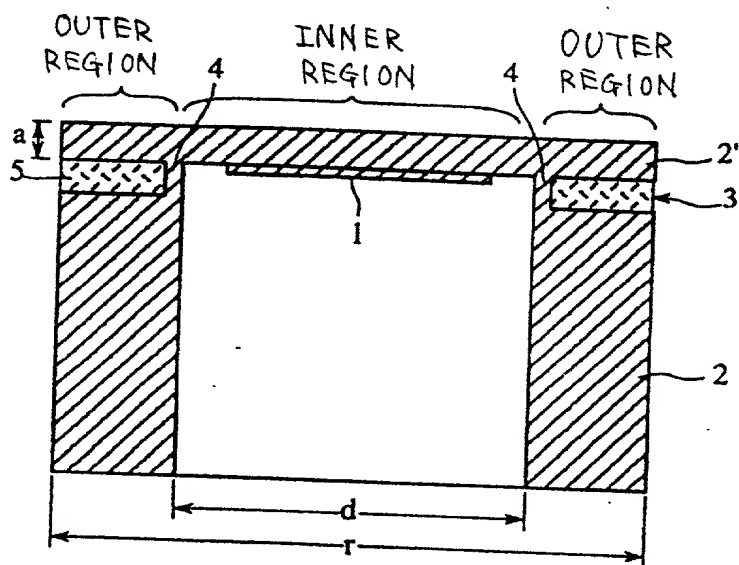


FIG. 5B

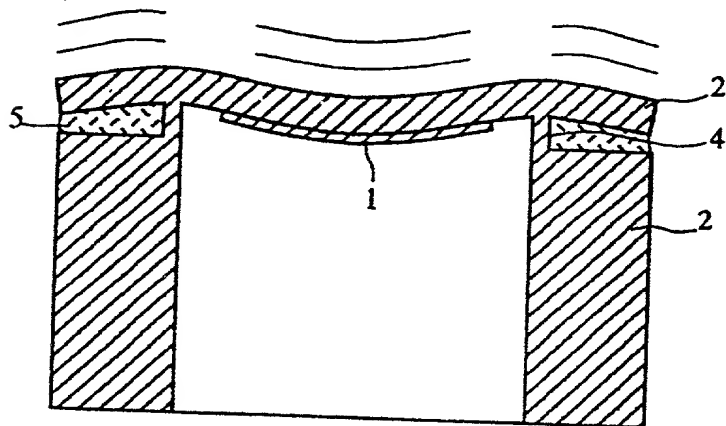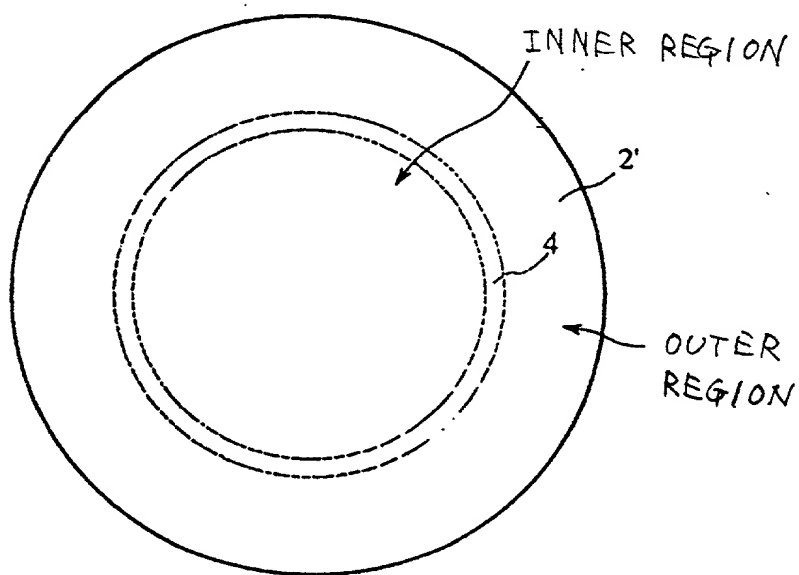

FLG. 5C

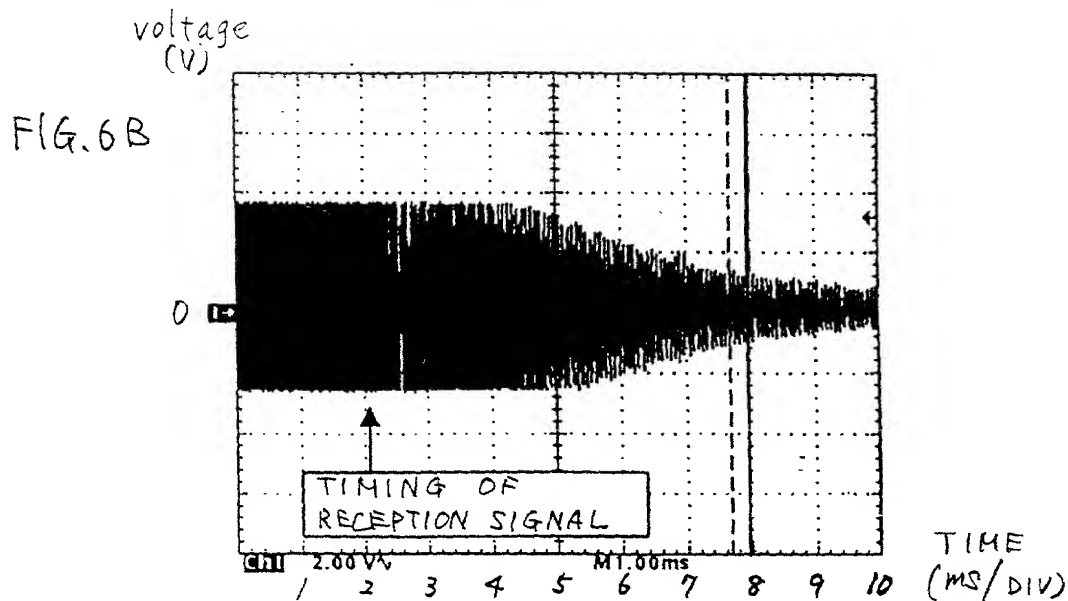

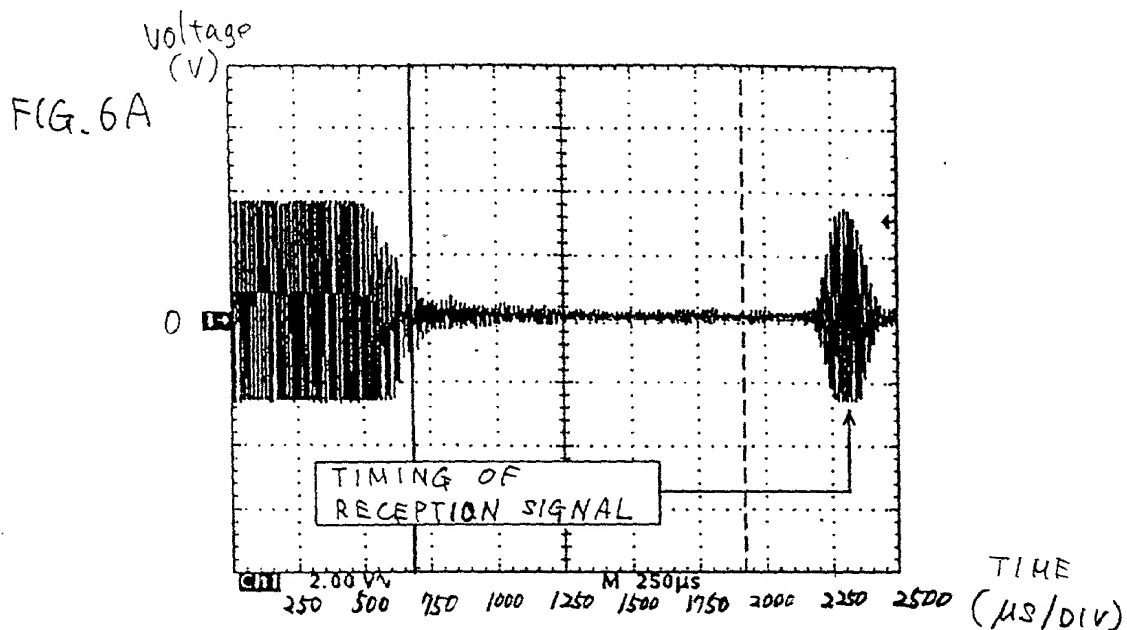

(v) voltage  
FIG.7

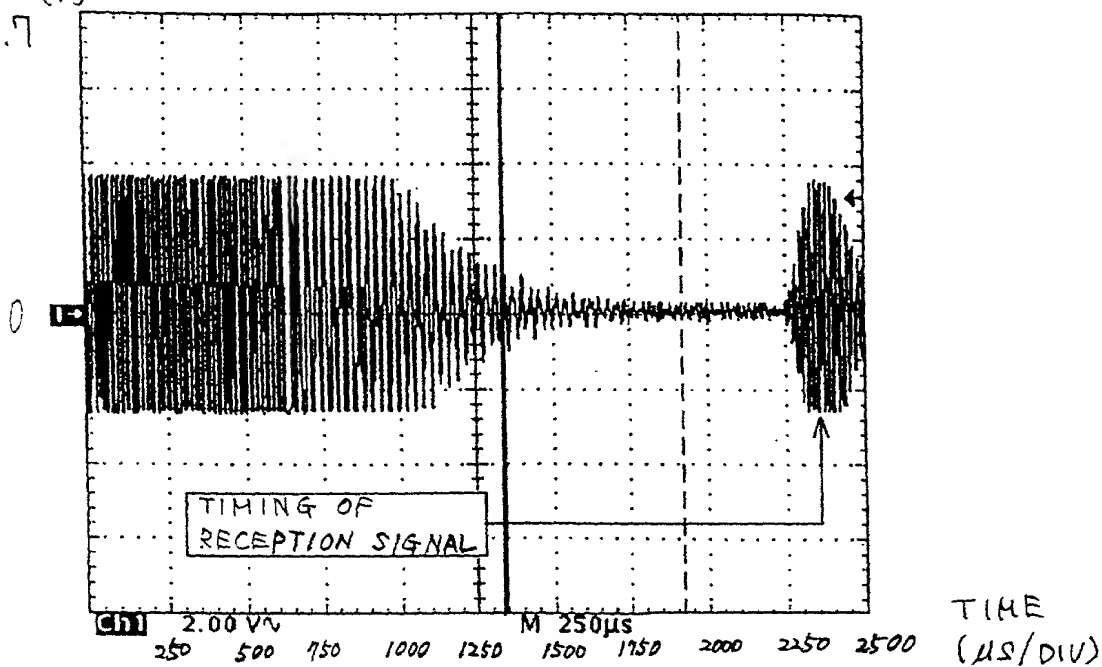


FIG.8

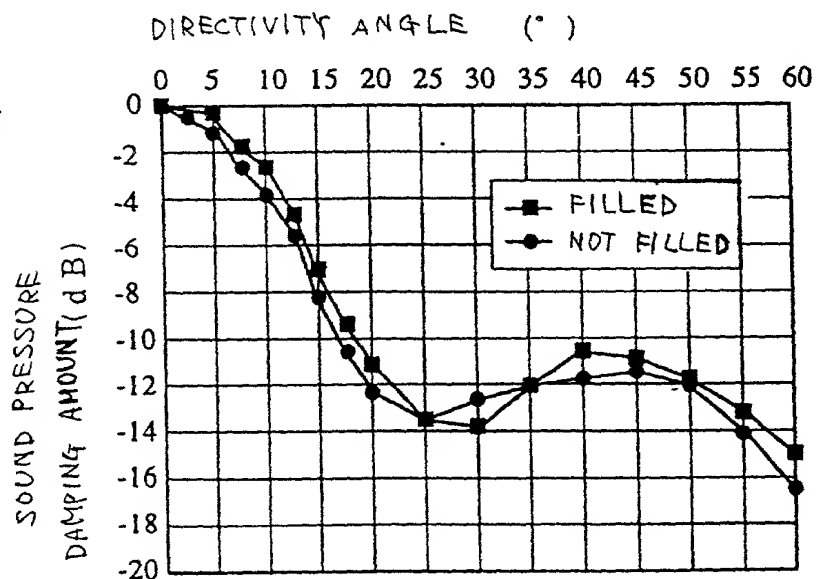


FIG.9A

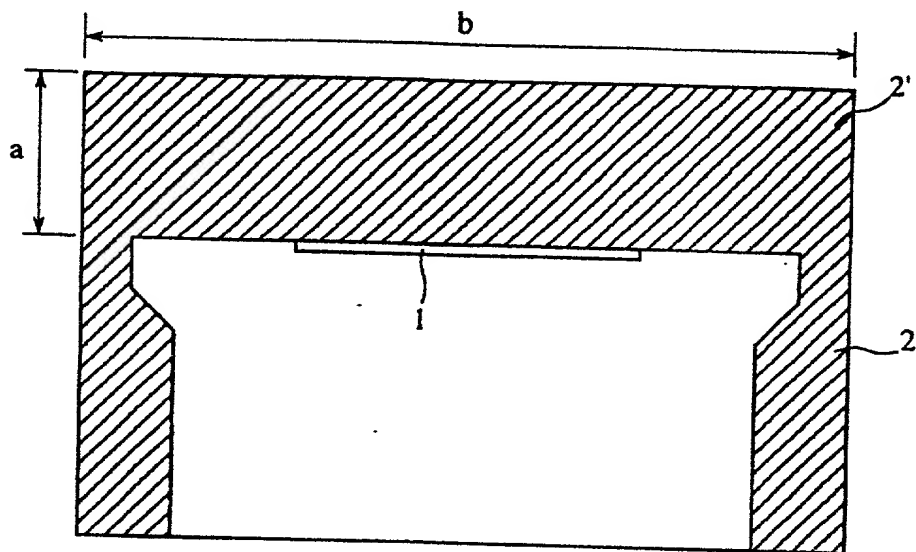


FIG.9B

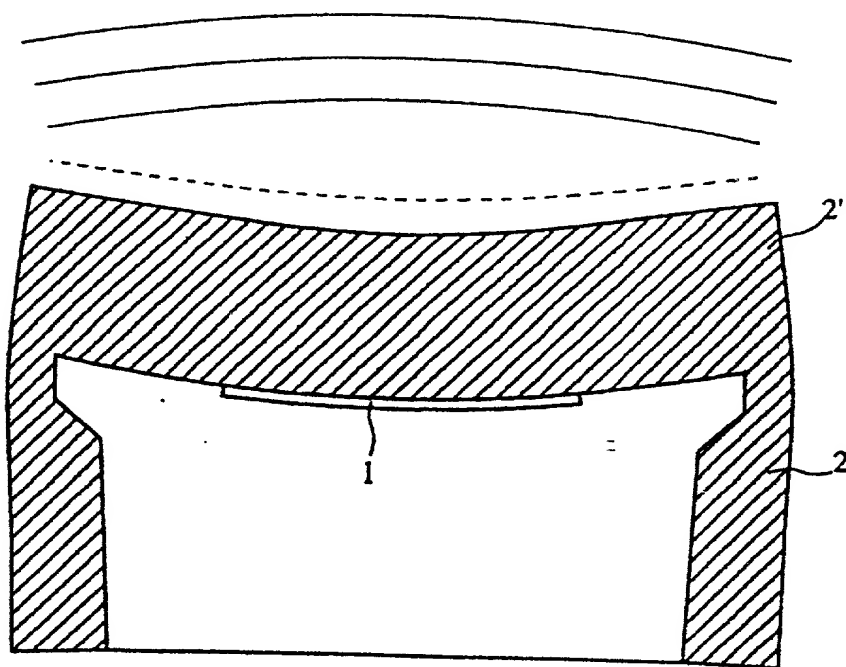


FIG. 10


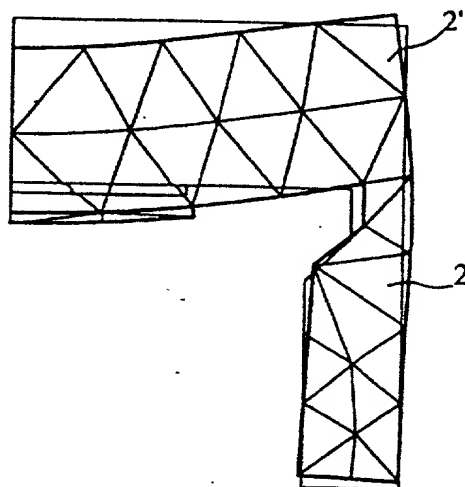


FIG. 11

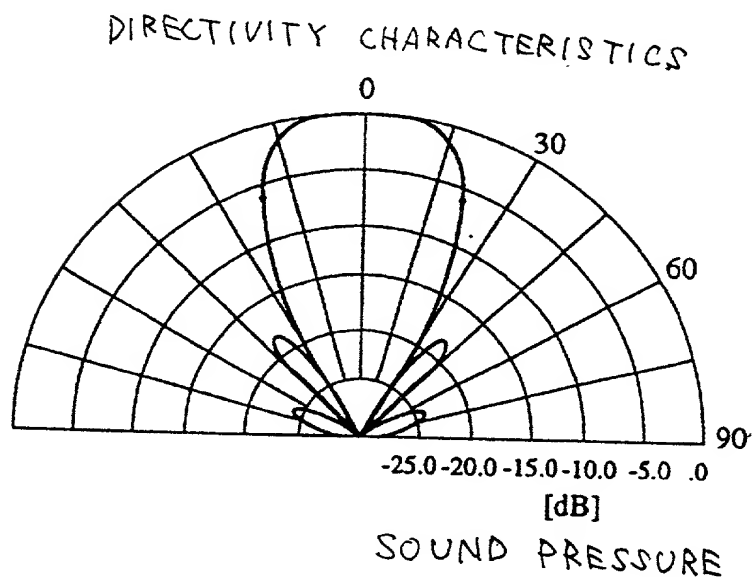

UNITED STATES OF AMERICA COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		OFGS FILE NO. P/1071-1201																																																								
<p>As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p style="text-align: center;"><b>ULTRASONIC VIBRATION APPARATUS</b></p>																																																										
<p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).</p> <p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p> <p>Prior Foreign or Provisional Application(s)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">COUNTRY</th> <th style="width: 25%;">APPLICATION NUMBER</th> <th style="width: 25%;">DATE OF FILING (day, month, year)</th> <th style="width: 25%;">PRIORITY CLAIMED UNDER 35 U.S.C. 119</th> </tr> </thead> <tbody> <tr> <td>Japan</td> <td>11-307558</td> <td>28 October 1999</td> <td>YES <u>X</u> NO ____</td> </tr> <tr> <td>Japan</td> <td>2000-61955</td> <td>7 March 2000</td> <td>YES <u>X</u> NO ____</td> </tr> <tr> <td></td> <td></td> <td></td> <td>YES ____ NO ____</td> </tr> </tbody> </table> <p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;">UNITED STATES APPLICATION NUMBER</th> <th style="width: 33%;">DATE OF FILING (day, month, year)</th> <th style="width: 34%;">STATUS (patented, pending, abandoned)</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table> <p>I hereby appoint customer no. 2352 OSTROLENK, FABER, GERB &amp; SOFFEN, LLP, and the members of the firm, Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944; Louis C. Dujmich - Reg. No. 30,625 and Douglas A. Miro - Reg. No. 31,643, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent &amp; Trademark Office connected therewith and to receive all correspondence.</p> <p>SEND CORRESPONDENCE TO: <b>OSTROLENK, FABER, GERB &amp; SOFFEN, LLP</b> DIRECT TELEPHONE CALLS TO:  1180 AVENUE OF THE AMERICAS (212) 382-0700  NEW YORK, NEW YORK 10036-8403  CUSTOMER NO. 2352</p> <p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 40%;">FULL NAME OF SOLE OR FIRST INVENTOR Kenji MATSUO</td> <td style="width: 30%;">INVENTOR'S SIGNATURE</td> <td style="width: 30%;">DATE</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country) Kanazawa-shi, Ishikawa-ken, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan</td> </tr> <tr> <td>FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Junshi OTA</td> <td>INVENTOR'S SIGNATURE</td> <td>DATE</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country) Ishikawa-gun, Ishikawa-ken, Japan</td> <td>COUNTRY OF CITIZENSHIP Japan</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan</td> </tr> <tr> <td>FULL NAME OF THIRD JOINT INVENTOR (IF ANY)</td> <td>INVENTOR'S SIGNATURE</td> <td>DATE</td> </tr> <tr> <td colspan="2">RESIDENCE (City and either State or Foreign Country)</td> <td>COUNTRY OF CITIZENSHIP</td> </tr> <tr> <td colspan="3">POST OFFICE ADDRESS</td> </tr> </table>				COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	Japan	11-307558	28 October 1999	YES <u>X</u> NO ____	Japan	2000-61955	7 March 2000	YES <u>X</u> NO ____				YES ____ NO ____	UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)										FULL NAME OF SOLE OR FIRST INVENTOR Kenji MATSUO	INVENTOR'S SIGNATURE	DATE	RESIDENCE (City and either State or Foreign Country) Kanazawa-shi, Ishikawa-ken, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan			FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Junshi OTA	INVENTOR'S SIGNATURE	DATE	RESIDENCE (City and either State or Foreign Country) Ishikawa-gun, Ishikawa-ken, Japan		COUNTRY OF CITIZENSHIP Japan	POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan			FULL NAME OF THIRD JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE	RESIDENCE (City and either State or Foreign Country)		COUNTRY OF CITIZENSHIP	POST OFFICE ADDRESS		
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119																																																							
Japan	11-307558	28 October 1999	YES <u>X</u> NO ____																																																							
Japan	2000-61955	7 March 2000	YES <u>X</u> NO ____																																																							
			YES ____ NO ____																																																							
UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)																																																								
FULL NAME OF SOLE OR FIRST INVENTOR Kenji MATSUO	INVENTOR'S SIGNATURE	DATE																																																								
RESIDENCE (City and either State or Foreign Country) Kanazawa-shi, Ishikawa-ken, Japan		COUNTRY OF CITIZENSHIP Japan																																																								
POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan																																																										
FULL NAME OF SECOND JOINT INVENTOR (IF ANY) Junshi OTA	INVENTOR'S SIGNATURE	DATE																																																								
RESIDENCE (City and either State or Foreign Country) Ishikawa-gun, Ishikawa-ken, Japan		COUNTRY OF CITIZENSHIP Japan																																																								
POST OFFICE ADDRESS c/o (A170) Intellectual Property Department, Murata Manufacturing Co., Ltd., 26-10, Tenjin 2-chome, Nagaokakyo-shi, Kyoto-fu 617-8555, Japan																																																										
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE																																																								
RESIDENCE (City and either State or Foreign Country)		COUNTRY OF CITIZENSHIP																																																								
POST OFFICE ADDRESS																																																										

☐ CONTINUED ON PAGE 2